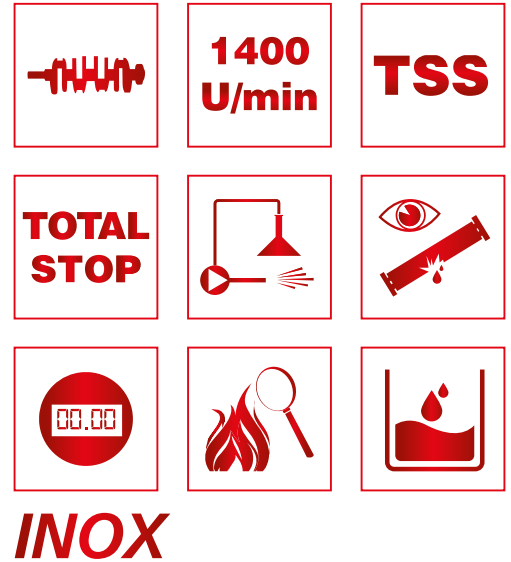


# High Pressure Cleaner

**HSC823 UK**


Type	HSC823 UK		HSC823 UK-INOX
Voltage	1/N/PE/AC/50Hz/240V	<ul style="list-style-type: none"> <li>Etronic II - Controls</li> <li>10m HP-Hose DN08 - 315bar</li> <li>Trigger-Gun with swivel</li> <li>Spray-Lance 900mm c/w Nozzle-Protection</li> <li>Stainless-Steel Jet-Nozzle 25°</li> <li>Water-Supply separation acc. water reg.</li> <li>Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>	<ul style="list-style-type: none"> <li>Stainless steel (food safe)</li> <li>Etronic II - Controls</li> <li>10m HP-Hose DN08 - 315bar</li> <li>Trigger-Gun with swivel</li> <li>Spray-Lance 900mm c/w Nozzle-Protection</li> <li>Stainless-Steel Jet-Nozzle 25°</li> <li>Water-Supply separation acc. water reg.</li> <li>Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>
Operating pressure	30-120bar/3-12MPa	301kg/318kg	300kg/317kg
Max. pressure	140bar/14MPa		
Discharge capacity	300-720l/h	122x75,5x162,5cm/125x81,5x175,5cm	122x75,5x162,5cm/125x81,5x175,5cm
Nozzle size	050		
Hot water capacity	30-98°C	301kg/318kg	300kg/317kg
Pump speed	1400rpm		
Connected load	3,0kW/13A	122x75,5x162,5cm/125x81,5x175,5cm	122x75,5x162,5cm/125x81,5x175,5cm
Electrical protection	13A slow		
Weight net/with package		301kg/318kg	300kg/317kg
Dimensions device/with package (LxWxH)		122x75,5x162,5cm/125x81,5x175,5cm	122x75,5x162,5cm/125x81,5x175,5cm

Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, 20mm PU-sound and thermal insulation, thermostatic chassis electric heating 80W, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2x20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable.

Art.No.	52602	525
---------	-------	-----